

B4M36DS2, BE4M36DS2: **Database Systems 2**

<http://www.ksi.mff.cuni.cz/~svoboda/courses/201-B4M36DS2/>

Lecture 4

XML Databases: XQuery

Martin Svoboda

martin.svoboda@fel.cvut.cz

19. 10. 2020

Charles University, Faculty of Mathematics and Physics

Czech Technical University in Prague, Faculty of Electrical Engineering

Lecture Outline

XQuery and XPath

- Query expressions
 - Constructors
 - FLWOR expressions
 - Conditions
 - Quantifiers

XQuery

XML Query Language

Sample Data

```
<?xml version="1.1" encoding="UTF-8"?>
<movies>
  <movie year="2006" rating="76" director="Jan Svěrák">
    <title>Vratné lahve</title>
    <actor>Zdeněk Svěrák</actor>
    <actor>Jiří Macháček</actor>
  </movie>
  <movie year="2000" rating="84">
    <title>Samotáři</title>
    <actor>Jitka Schneiderová</actor>
    <actor>Ivan Trojan</actor>
    <actor>Jiří Macháček</actor>
  </movie>
  <movie year="2007" rating="53" director="Jan Hřebejk">
    <title>Medvídek</title>
    <actor>Jiří Macháček</actor>
    <actor>Ivan Trojan</actor>
  </movie>
</movies>
```

Expressions


XQuery expressions

- **Path** expressions (traditional XPath)
 - Selection of nodes of an XML tree
- **FLWOR** expressions
 - `for ... let ... where ... order by ... return ...`
- **Conditional** expressions
 - `if ... then ... else ...`
- **Quantified** expressions
 - `some|every ... satisfies ...`

Expressions

XQuery expressions

- **Boolean** expressions
 - `and`, `or`, `not` logical connectives
- **Primary** expressions
 - Literals, variable references, function calls, **constructors**, ...
- ...

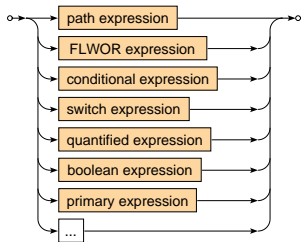


Constructors

Constructors

- Allow us to **create new nodes for elements, attributes, ...**
- **Direct constructor**
 - Well-formed XML fragment with **nested query expressions**
 - E.g.: `<movies>{ count(//movie) }</movies>`
 - **Names of elements and attributes must be fixed,** their content can be dynamic
- **Computed constructor**
 - Special syntax
 - E.g.: `element movies { count(//movie) }`
 - **Both names and content can be dynamic**

Constructors

Direct constructor

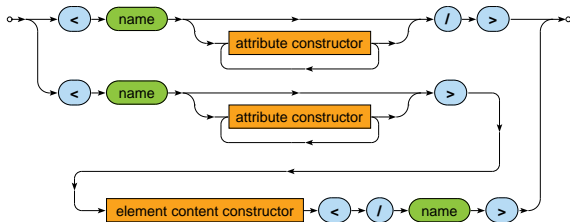


- Both **attribute value** and **element content** may contain an arbitrary number of **nested query expressions**
 - Enclosed by curly braces `{ }`
 - Escaping sequences: `{ { and } }`


Constructors

Direct constructor

- Attribute



- Element content



Constructors

Example: Direct Constructor


Create a summary of all movies

```
<movies>
  <count>{ count(//movie) }</count>
  {
    for $m in //movie
    return
      <movie year="{ data($m/@year) }">{ $m/title/text() }</movie>
  }
</movies>
```

```
<movies>
  <count>3</count>
  <movie year="2006">Vratné lahve</movie>
  <movie year="2000">Samotáři</movie>
  <movie year="2007">Medvídek</movie>
</movies>
```

Constructors

Computed constructor

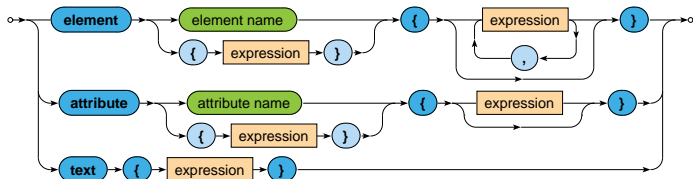

Constructors

Example: Computed Constructor

Create a summary of all movies


```
element movies {  
  element count { count(//movie) },  
  for $m in //movie  
  return  
    element movie {  
      attribute year { data($m/@year) },  
      text { $m/title/text() }  
    }  
}
```

```
<movies>  
  <count>3</count>  
  <movie year="2006">Vratné lahve</movie>  
  <movie year="2000">Samotáři</movie>  
  <movie year="2007">Medvídek</movie>  
</movies>
```

FLWOR Expressions

FLWOR expression

- Versatile construct allowing for **iterations over sequences**



Clauses

- `for` – selection of items to be iterated over
- `let` – bindings of auxiliary variables
- `where` – conditions to be satisfied (by a given item)
- `order by` – order in which the items are processed
- `return` – result to be constructed (for a given item)

FLWOR Expressions

Example

Find titles of movies with rating 75 and more


```
for $m in //movie
let $r := $m/@rating
where $r >= 75
order by $m/@year
return $m/title/text()
```

```
Samotáři
Vratné lahve
```

FLWOR Clauses


For clause

- Specifies a **sequence of values or nodes to be iterated over**
- Multiple sequences can be specified at once
 - Then the behavior is identical as when more single-variable `for` clauses would be provided



Let clause


- Defines one or more auxiliary **variable assignments**



FLWOR Clauses


Where clause

- Allows to describe complex **filtering conditions**
- Items not satisfying the conditions are skipped



Order by clause


- Defines the **order in which the items are processed**

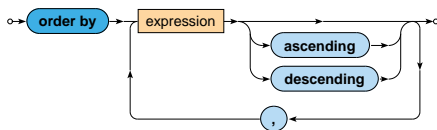

FLWOR Clauses

Return clause

- **Defines how the result sequence is constructed**
- Evaluated once for each suitable item



Various supported **use cases**

- Querying, joining, grouping, aggregation, integration, transformation, validation, ...

FLWOR Examples

Find titles of movies filmed in *2000* or later such that they have at most 3 actors and a rating above the overall average

```
let $r := avg(//movie/@rating)
for $m in //movie[@rating >= $r]
let $a := count($m/actor)
where ($a <= 3) and ($m/@year >= 2000)
order by $a ascending, $m/title descending
return $m/title
```

```
<title>Vratné lahve</title>
<title>Samotáři</title>
```

FLWOR Examples

Find movies in which each individual actor starred

```
for $a in distinct-values(//actor)
return <actor name="{ $a }">
  {
    for $m in //movie[actor[text() = $a]]
    return <movie>{ $m/title/text() }</movie>
  }
</actor>
```

```
<actor name="Zdeněk Svěrák">
  <movie>Vratné lahve</movie>
</actor>
<actor name="Jiří Macháček">
  <movie>Vratné lahve</movie>
  <movie>Samotáři</movie>
  <movie>Medvídek</movie>
</actor>
...
```

FLWOR Examples

Construct an HTML table with data about movies

```
<table>
  <tr><th>Title</th><th>Year</th><th>Actors</th></tr>
  {
    for $m in //movie
    return
      <tr>
        <td>{ $m/title/text() }</td>
        <td>{ data($m/@year) }</td>
        <td>{ count($m/actor) }</td>
      </tr>
  }
</table>
```

FLWOR Examples

Construct an HTML table with data about movies

```
<table>
  <tr><th>Title</th><th>Year</th><th>Actors</th></tr>
  <tr><td>Vratné lahve</td><td>2006</td><td>2</td></tr>
  <tr><td>Samotáři</td><td>2000</td><td>3</td></tr>
  <tr><td>Medvídek</td><td>2007</td><td>2</td></tr>
</table>
```

Conditional Expressions

Conditional expression



- Note that the else branch is compulsory
 - Empty sequence () can be returned if needed

Example


```
if (count(//movie) > 0)
then <movies>{ string-join(//movie/title, ", ") }</movies>
else ()
```

```
<movies>Vratné lahve, Samotáři, Medvídek</movies>
```

Switch Expressions

Switch

- **The first matching branch is chosen,** its return clause is evaluated and the result returned

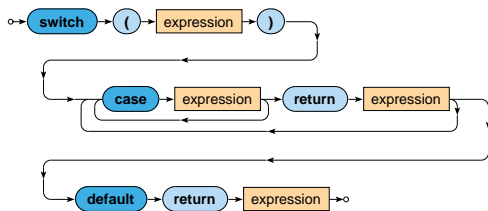

- The default branch is compulsory and must be provided as the last option

Switch Expressions

Example


Return movies with aggregated information about their actors

```
xquery version "3.0";
for $m in //movie
return
  <movie>
    { $m/title }
    {
      switch (count($m/actor))
      case 0 return <no-actors/>
      case 1 return <actor>{ $m/actor/text() }</actor>
      default return <actors>{ string-join($m/actor, ", ") }</actors>
    }
  </movie>
```


Quantified Expressions

Quantifier

- Returns true if and only if...
 - in case of some **at least one item**
 - in case of every **all the items**
- ... of a given sequence/s **satisfy the provided condition**



Quantified Expressions

Examples

Find titles of movies in which *Ivan Trojan* played

```
for $m in //movie
where
  some $a in $m/actor satisfies $a = "Ivan Trojan"
return $m/title/text()
```

Samotáři
Medvídek


Find names of actors who played in all movies

```
for $a in distinct-values(//actor)
where
  every $m in //movie satisfies $m/actor[text() = $a]
return $a
```

Jiří Macháček

FLWOR Expressions

Extended **FLWOR** expression (XQuery 3.0)

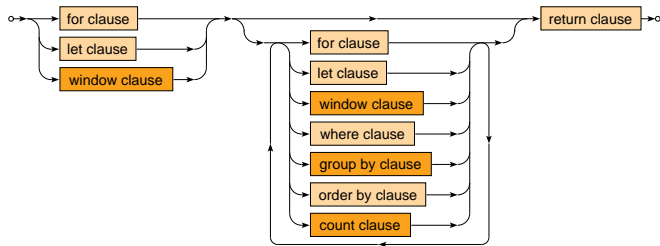


Clauses

- `window` – sliding or tumbling windows to iterate over
- `group by` – equality-based groupings of input items
- `count` – positional numbers of tuples in a stream

FLWOR For Clauses

For clause


- Optional allowing empty
 - One () item is considered instead of an empty sequence
 - Suitable for outer joins
 - Does not eliminate one item when the other would be missing
- Positional variable
 - Allows to access the ordinal number of the current item

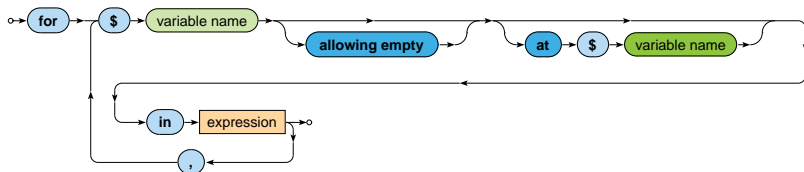

FLWOR Group By Clauses

Group by clause


- Performs **equality-based grouping** defined by one or more grouping variables
 - Only singleton values are permitted for these variables
 - Otherwise a runtime error is raised
 - Each input item will appear only in one output group
- **Non-grouping variable** is rebound to a sequence of all the matching items from a given group



FLWOR Window Clauses

Window clause


- Allows to iterate over the generated windows
 - Two modes: **tumbling** and **sliding**
- Window = **sequence of consecutive items** from the input
 - Accessible via the main variable
 - Contains the start item, end item, and all items between them

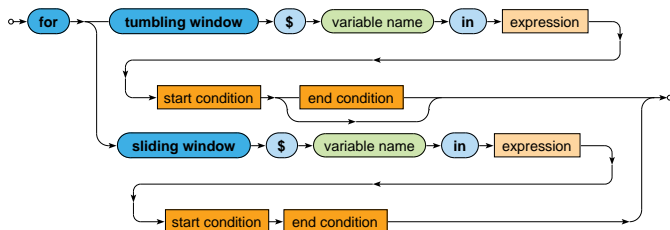

FLWOR Window Clauses


Window **start condition**

- Start item is an item that satisfies a given condition



Window **end condition**


- End item is the first item (beginning with the start item) that satisfies a given condition
- When such an item cannot be found...
 - Then the last item is the very last input item
 - But only in case the `only` keyword is not specified
 - Otherwise such a window is not generated at all



FLWOR Window Clauses

Window variables (all of them are optional)

- Bound to the first/last item
- `at`: bound to the ordinal position of the first/last item
- `previous`: bound to the item that precedes the first/last item
- `next`: bound to the item that follows the first/last item



FLWOR Window Clauses

Tumbling window

- Search for the start item of the next window begins with the item that follows the end item of the previous window (or at the very beginning)
- \Rightarrow **windows never overlap**
 - Input item may never be found in multiple windows
- When the end condition is missing...
 - All start items are first detected
 - Each window is terminated by the item that precedes the next starting one (or by the last input item at the very end)

FLWOR Window Clauses

Sliding window

- Every item that satisfies the start condition becomes the starting item of a new window
- \Rightarrow **windows may overlap**
 - Input item may be found in multiple windows

FLWOR Count Clauses


Count clause

- Allows to access the ordinal number of the current tuple in a stream



Primary Expressions

Primary expression

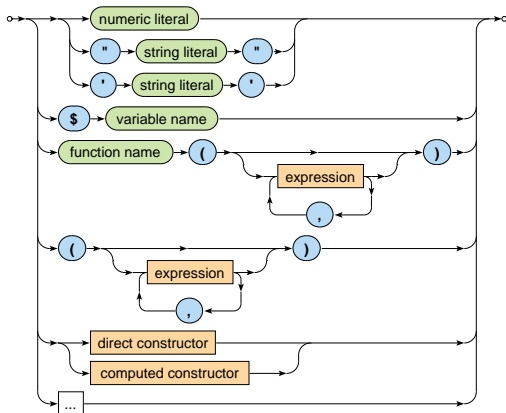

Final Observations

XQuery

- **Keywords** must always be in **lowercase**
- XQuery is a **functional query language**
- Whenever `expression` is mentioned in any diagram, expression of any kind can be used (without any limitations)

Lecture Conclusion

XPath expressions

- Absolute / relative paths
- Axes, node tests, predicates

XQuery expressions

- Constructors: direct, computed
- FLWOR expressions
- Conditional, quantified, comparison, ...